


XL-1125



- ⊙ Small body, Simple installation.
- ⊙ Support manual and continuous scanning.
- ⊙ Can be easily embedded in various device.
- ⊙ Easy to be integrated with OEM equipment.
- ⊙ Actively identify the 1D barcode on screen.
- ⊙ Be Suitable for Data Collector, POS, Kiosk etc.

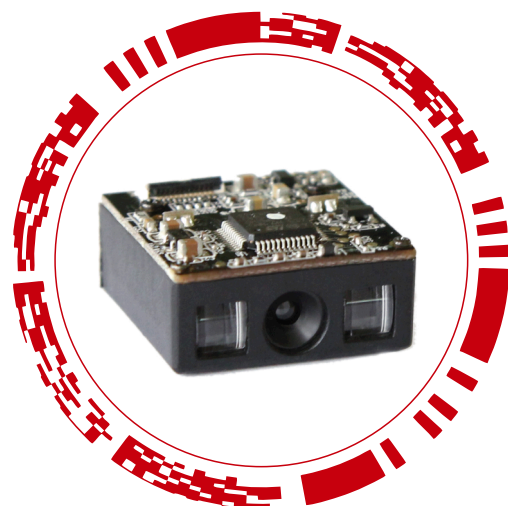

Model Number	XL-1125	Size	L x W x H: 24.1mm x 24.2mm x 10mm
CPU	32Bit ARM	Weight	7.5g
Scan Type	Linear Image	positioning hole	1.4mm diameter *3mm
Scan Pattern	2500 Pixel image	Voltage	5VDC
Decode Rate	300 times per second	Scan Mode	Manual & Continue scanning
Scan Precision	3mil/0.1mm@pcs90%, code39	Operating Current	Max 120mA
Scan Depth of field	30-330mm (13mil, pcs90%)	Static Current	45mA
Tilt	30	Light source	LED (622nm-628nm)
Elevation Angle	65	EMC	CE & FCC DOC compliance
Deflection Angle	55	Operating Temperature	-20°C to 60°C
Support Interface	UART-TTL/USB-HID/USB-VCP	Storage Temperature	-40°C to 85°C
Print Contrast	10% UPC/EAN 100%	Humidity	5% to 95% relative humidity, non-condensing
Mention Pattern	Buzzer, Indicator	Light Levels	Daylight, 0-100,000Lux
Decoding Capability	Industool 2 of 5, Standard 25, Matrix 25, China post 25, Code 11, Codabar, MSI/plessey, UK/plessey, Code39(Standard 39 & Full ASCII Code 39), Code 32, Code 93, Code128, UPCA, UPCE, EAN13, EAN8, UPC/EAN add-on 2/5, ISBN, ISSN, GS1(RSS) RSS-14, LIMITED, EXPENDED, Include GS1 STACK		



SUNLUX IOT Technology (Guangdong) Inc.

Office Add: 4F, No.7, Kehui First Street, Science Road, Science City, Guangzhou, China

Tel: +86-20-32053765 Fax: +86-20-82115390 Site: www.xl-scan.com E-mail: sales@xl-scan.com