


2D Wireless Scanner

XL-9522



- ⊗ 2200mAh large battery capacity
- ⊗ IP54 standard, withstand 1.5M drop
- ⊗ One receiver support 99 scanners
- ⊗ Read all major 1D&2D barcodes both
- ⊗ 600 meters of communication distance

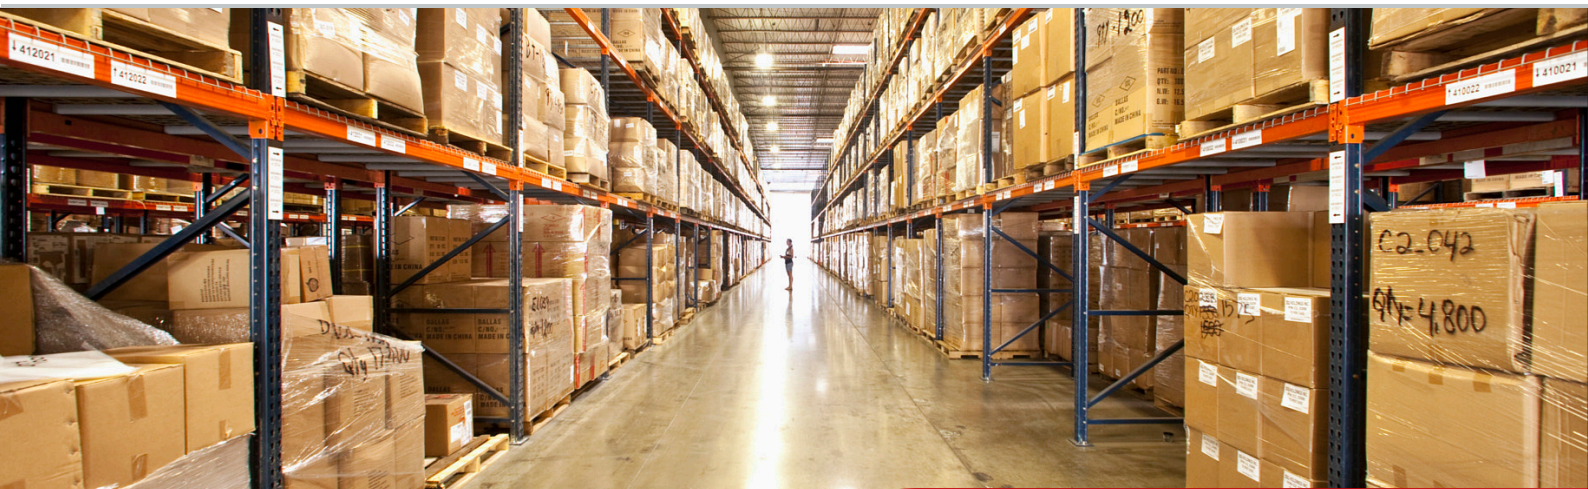

Light Source	Red (LED) , White (LED)	Size	L × W × H:170mm × 71mm × 98mm
Scan Pattern	Manual & Continuous	Charge Mode	Wireless charging
Image Sensor	CMOS	Weight	900g
Working Frequency	433 MHz ISM frequency	Material	ABS+PC
Communication distance	Up to 600m at open places	Voltage	2200mAh / DC 5V
Scan Precision	≥5mil	Operating Current	220mA / 34mA
Scan Rate	30 times/second	Mention Pattern	Buzzer, Indicator
Scan Width	5*5cm-30*30cm	IP Standard	IP54
Depth of Scan Field	40-220mm(13mil PCS 90%)	Operate/Storage Temperature	-20°C to 60°C / -40°C to 85°C
Scan Angle	Elevation ±65° Corner360° Deflection ±60°	Humidity	5% to 90% relative humidity
Support Interface	USB-HID , USB-VCP	Shock	1.5M drops
Decoding Capability	1D SUPPORT: industrial 25、standard、matrix 25、china post 25、code 11、codabar、MSI/Plessey、code39 (standard 39 & full ASCII code 39)、code 32、code 93、code128、UPCA、UPCE、EAN13、EAN8、UPC/EAN、add-on 2/5、ISBN、ISSN、GS1(RSS) RSS-14、LIMITED、EXPENDED、include GS1 STACK 2D SUPPORT: PDF417, Data Matrix ,Qr Code . ect.		



SUNLUX IOT Technology (Guangdong) Inc.

Office Add: 4F,No.7 ,Kehui First Street ,Science Road,Science City,Guangzhou,China

Tel: +86-20-32053765 Fax: +86-20-82115390 Site: www.xl-scan.com E-mail: sales@xl-scan.com